




**AUSTRALIAN  
INHIBITOR**  
PROTECTION PREVENTION PRESERVATION PROVEN


# PREMIUM METALGUARD

## CORROSION TEST

Kreig testing is used to verify the effectiveness of the VCI actives. On the left is the VCI Premium Metalguard protected test taken on the right an unprotected control

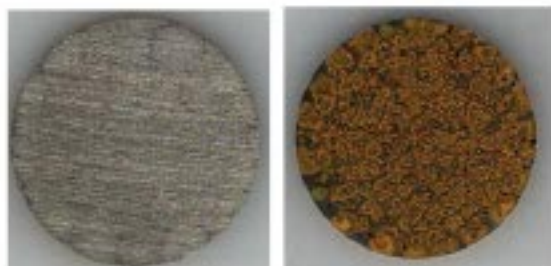

## BARRIER PROPERTIES

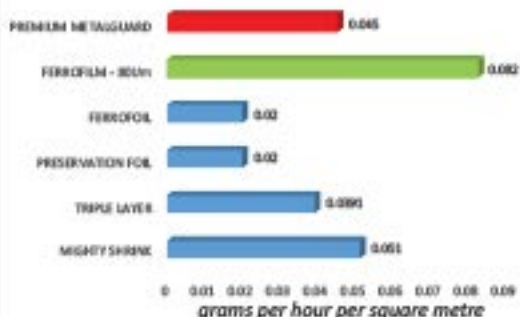

MVTR is the Moisture Vapour Transfer Rate of the product. All films allow a small amount of moisture to pass through. The lower the value the better the performance of the material


Using ASTM E96/E 96M - 05 methods

## PUNCTURE RESISTANCE



The dart test is a measure of strength. The resistance of the film against the combined weight and speed of a falling dart is depicted here. The higher the number the greater the strength.

To ASTM D 1709

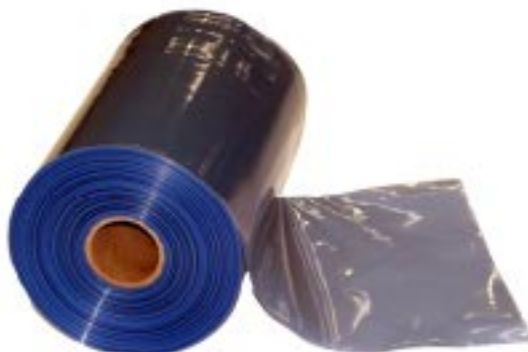

### Key Attributes.

- High performance protection from corrosion
- Protects ferrous and non-ferrous metals
- Multilayer Co-ex film provides high barrier properties
- High resistance to puncturing and tearing
- Improved sealing properties at low temperatures
- Available in a range of size, thickness, styles.